



PARTIAL INLET


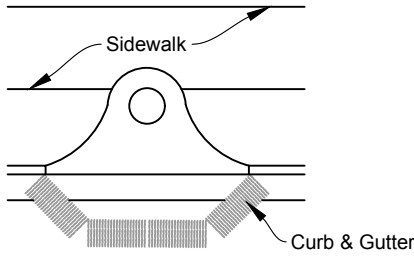


COMPLETED INLET

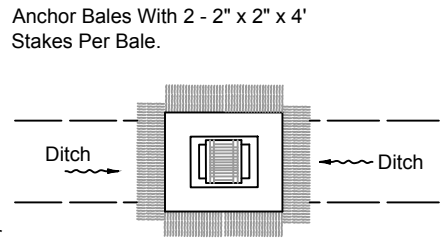


DITCH BOTTOM INLET

PROTECTION AROUND INLETS OR SIMILAR STRUCTURES

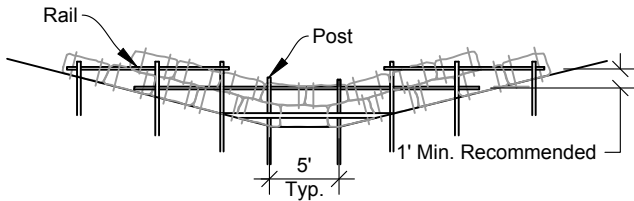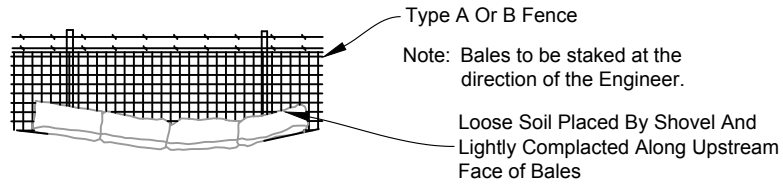

Anchor Bales With 2 - 2" x 2" x 4' Stakes Per Bale.
Anchor Top Bales To Lower Bales With 2 - 2" x 2" x 4' Stakes Per Bale.

ELEVATION
TYPE II

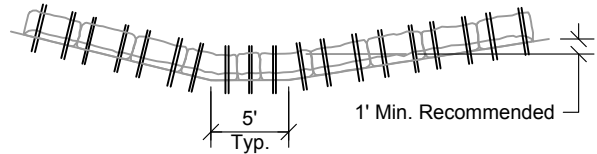


Anchor Bales With 2 - 2" x 2" x 4' Stakes Per Bale.


ELEVATION
TYPE I

Application and Spacing: The use of Types I & II bale barriers should be limited to the conditions outlined in Chart I, Sheet 1 of 3, Index No. 102, FDOT standard specifications.

BARRIER FOR UNPAVED DITCHES

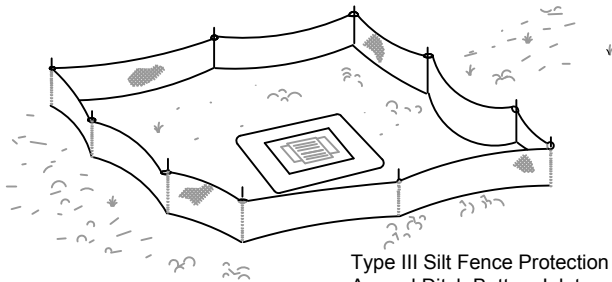

Type III Silt Fence Protection Around Ditch Bottom Inlets.

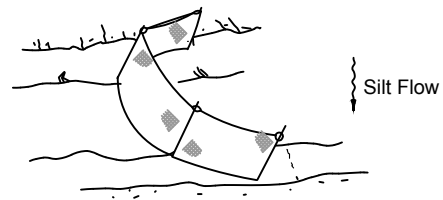

Note: Spacing for Type III Fence to be in accordance with Chart 1, Sheet 1 of 3, and ditch installations at drainage structures Sheet 2 of 3.

Type III Silt Fence

Do not deploy in a manner that silt fences will act as a dam across permanent flowing watercourses. Silt fences are to be used at upland locations and turbidity barriers used at permanent bodies of water.

SILT FENCE APPLICATIONS

BALED HAY OR STRAW BARRIERS AND SILT FENCES